


# LV Cast resin series reactors

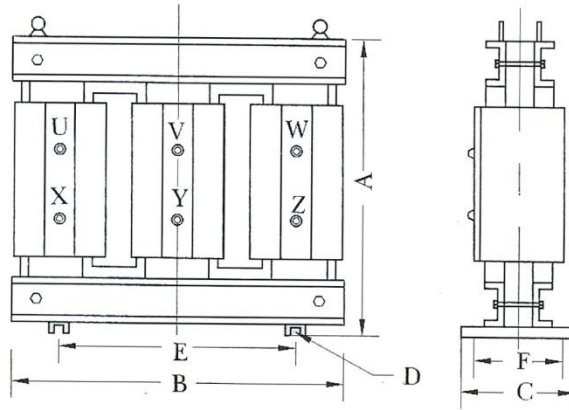


Frequency:60 Hz  
 Phase:3 $\psi$   
 Insulation Class:F Class  
 Terminal Voltage:6.0%

外形尺寸(m.m)

System voltage	Capacity (kVAR)	A	B	C	D	E	F	Weight (kg)	
220	1.2	250	400	180	13	250	120	40	
	1.5	250	400	180	13	250	120	45	
	1.8	250	400	180	13	250	120	50	
	2.4	250	400	180	13	250	120	55	
	3	280	450	200	13	300	140	60	
	3.6	280	450	200	13	300	140	65	
	4.2	300	480	200	13	300	140	70	
	380	4.5	300	480	200	13	300	140	75
	440	4.8	300	480	200	13	300	140	80
	480	6	325	480	300	13	300	250	100
		7.2	340	520	300	13	350	250	110
		8.4	360	520	300	13	350	250	120
9.6		360	560	300	13	350	250	130	
12		360	560	300	13	350	250	145	
	15	400	600	300	13	350	250	165	

# HV Cast resin series reactors

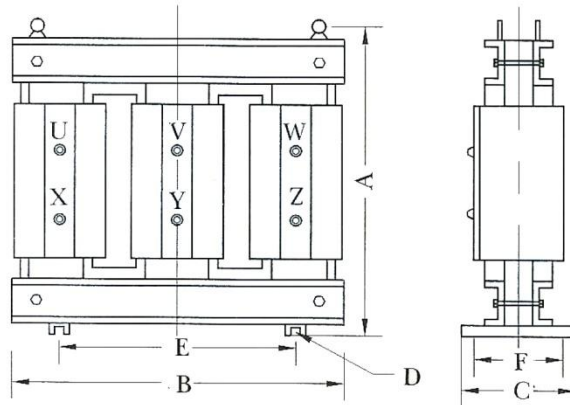

Frequency:60 Hz  
 Phase:3ψ  
 Insulation Class:F Class  
 Terminal Voltage:6.0%

外形尺寸(m.m)

System voltage	Capacity (kVAR)	A	B	C	D	E	F	Weight (kg)
3300 3450 3600 4160 6600 7200 11400 11950 12000	3	480	680	400	13	450	300	110
	6	480	680	400	13	450	300	130
	9	530	700	400	13	450	300	180
	12	580	720	400	13	450	300	230
	15	580	720	400	13	450	300	250
	18	580	750	400	13	450	300	270
	24	580	750	400	13	450	300	300
	30	620	840	400	13	550	300	340
	36	650	840	450	13	550	400	360
	45	680	840	450	13	550	400	400
	48	750	840	450	13	550	400	450
	54	750	860	450	13	550	400	480
	60	750	920	500	13	600	400	540
	72	750	1000	500	13	600	400	580
	96	820	1000	550	13	650	450	650
	120	840	1050	650	13	700	550	750
	150	840	1100	650	13	700	550	820
	180	840	1150	650	13	750	550	900
200	840	1200	650	13	850	550	1000	