



# Dry type starting reactor

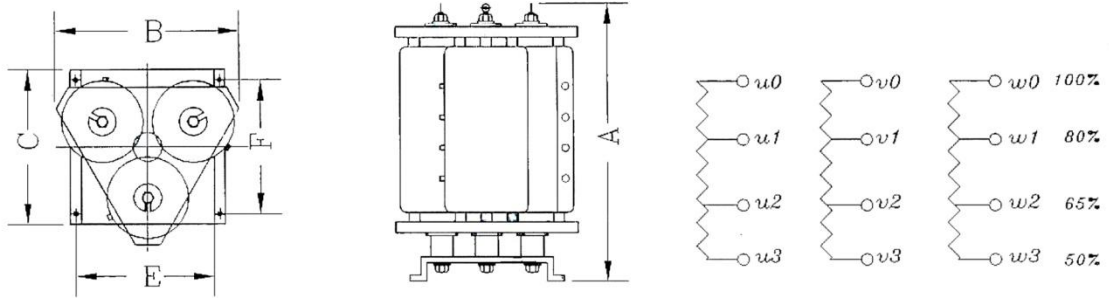

50 / 60 HZ

Capacity (HP)	System voltage	Start time (sec)	Insulation class	Dimension (mm)					Weight (kg)	
				A	B	C	E	F		
50	220	60/90	B	360	340	340	290	290	75	
75				360	340	340	290	290	80	
100				360	340	340	290	290	85	
125				360	360	360	290	290	90	
150				360	400	400	290	290	100	
200				360	420	420	290	290	120	
250				400	430	430	290	290	135	
300				380	400	460	460	290	290	150
350				440	440	460	460	290	290	165
400				440	480	480	290	290	180	
500				440	500	500	350	350	200	
600				540	520	520	380	380	225	
700				540	520	520	380	380	250	
800				540	540	540	400	400	275	
900				540	540	540	400	400	300	
1000				540	570	570	420	420	320	
1250	540	570	570	420	420	350				
1500	540	570	570	420	420	380				

# Dry type starting reactor

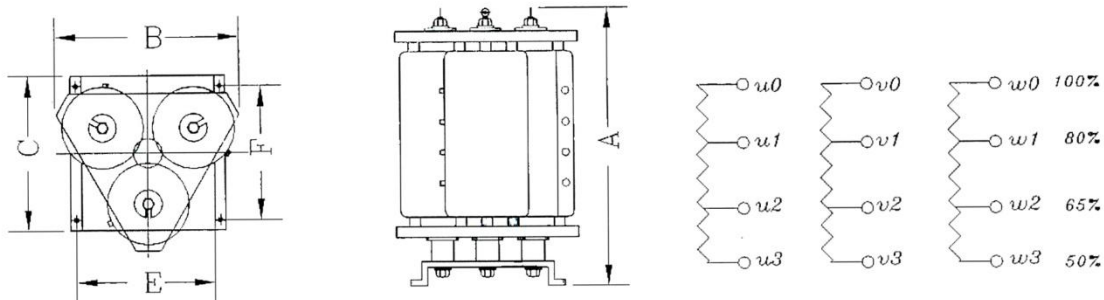

50 / 60 HZ

Capacity (HP)	System voltage	Start time (sec)	Insulation class	Dimension (mm)					Weight (kg)	
				A	B	C	E	F		
50	2200	180/60	B	360	340	340	290	290	85	
75				360	340	340	290	290	95	
100				360	340	340	290	290	110	
125				360	360	360	290	290	125	
150				360	400	400	290	290	140	
200				360	420	420	290	290	155	
250				3300	400	430	430	290	290	170
300				3450	450	460	460	290	290	190
350				3600	450	460	460	290	290	210
400				4160	450	480	480	350	350	230
500				450	550	550	420	420	250	
600				450	550	550	420	420	270	
700				450	550	550	440	440	300	
800				470	570	570	450	450	320	
900				470	570	570	450	450	340	
1000	540	640	640	450	450	360				
1250	540	640	640	450	450	380				
1500	620	650	650	450	450	450				